


# FlameAwear Yellow Cargo Trousers - 290g

## Technical Data Sheet

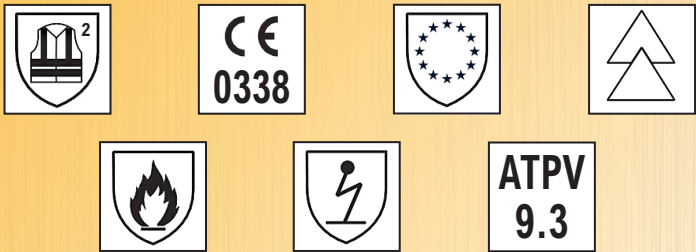

**Standards:**

|                                  |                                 |
|----------------------------------|---------------------------------|
| EN ISO 20471-2013 Class 2        | EN ISO 11611:2015 A1 A2 Class 1 |
| EN ISO 13688-2013                | EN ISO 11612:2015 A1-A2-B1-C1   |
| IEC 61482-2:2009                 | EN1149-3-2004                   |
| EN61482-1-2:2007                 | EN1149-5-2008                   |
| Box Test: Class 1 4kA            |                                 |
| EN61482-1-1:2009                 |                                 |
| Open Arc Test: ATPV: 9.3 cal/cm² |                                 |

**Specifications:**

- Material: 60% modacrylic, 40% cotton, with anti static.
- 1 back pocket.
- 2 front pockets.
- Protection against heat and flame.
- Protection against electric arc to class 1 (4KA).
- Electrostatic protection.
- Protection against chemicals.
- Knee pad pockets.
- Both zipped and Velcro boot hem line.
- 290gsm.
- Sizes 28 - 48 inch waist.
- Available in short, regular or tall leg.

|   |         |
|---|---------|
| Q-Flame Yellow Cargo Trousers - Short Leg   | JFA419S |
| Q-Flame Yellow Cargo Trousers - Regular Leg | JFA419R |
| Q-Flame Yellow Cargo Trousers - Tall Leg    | JFA419T |



**Aftercare:**

|                        |                     |
|------------------------|---------------------|
| Machine Wash 40°C.     | Do Not Tumble Dry.  |
| One Dot Iron-Low Heat. | Do Not Use Soap.    |
| Do Not Bleach.         | Use Detergent Only. |
| Do Not Dry Clean.      |                     |

**Limitation of Use:**

Limited flame spread properties will be reduced if contaminated with flammable liquids. This garment does not provide protection against electric shock. To ensure the flame resistant and anti-static properties of this garment are fully utilised it should be worn in conjunction with suitable PPE conforming to the relevant standard. Workers wearing the electrostatic dissipative protective clothing shall be properly earthed. Electrostatic dissipative protective clothing shall not be opened or removed whilst in the presence of flammable or explosive atmospheres without prior approval of the responsible safety engineer. The electrostatic dissipative performance of the clothing can be affected by wear and tear, laundering and possible contamination. Electrostatic dissipative performance of the clothing shall permanently cover all none-complying materials during normal use (including bending and movements).

**Repair and Modification:**

DO NOT attempt repairs. DO NOT modify this garment.

**Storage:**

Always store in clean, dry conditions, DO NOT store in places subject to direct strong sunlight. This garment must be kept clean to be effective. Replace if permanently stained or faded. Ensure when wearing the garments all zips/buttons and fasteners are closed.

